



60MHz Standard Filter

Part Number 060120

Typical Performance

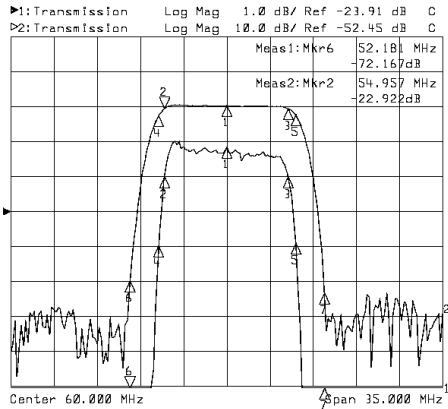



Horizontal: 3.5MHz/Div
Vertical: 1dB/Div&10dB/Div

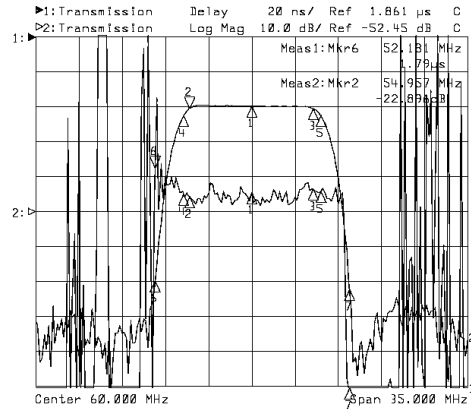

Horizontal: 3.5MHz/Div
Vertical: 20nsec/Div&10dB/Div

Specifications				
Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	59.90	60.00	60.10
Insertion Loss at F0	dB		23.00	23.50
1 dB Bandwidth	MHz	9.60	10.00	
3 dB Bandwidth	MHz	10.50	11.00	
50dB Bandwidth	MHz		15.80	16.00
Passband Variation	dB		0.40	0.60
Group Delay Variation	nsec		15	20
Absolute Delay	usec		1.70	1.80
Ultimate Rejection	dB	52	55	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

Package X0

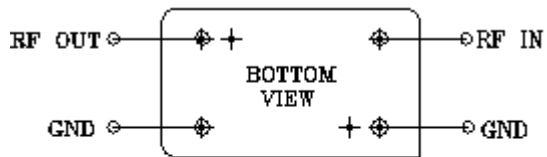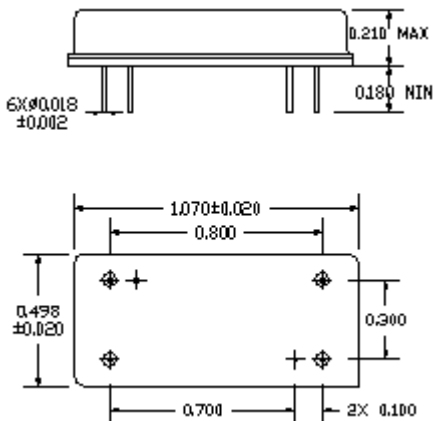

No Matching Required
Source/Load Impedance=50ohm
Package Style X0