



# 70MHz Standard Filter

## Part Number 070013A

### Typical Performance

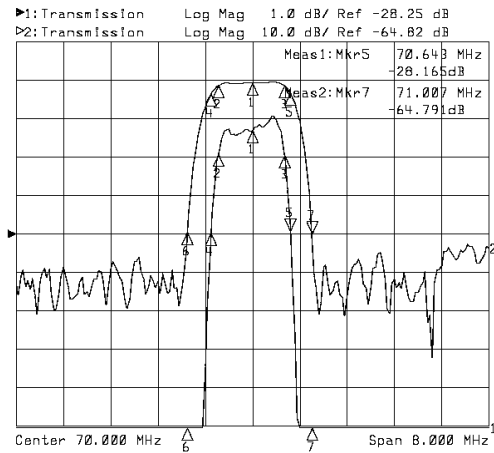

Horizontal: 0.8MHz/Div  
Vertical: 1dB/Div & 10dB/Div



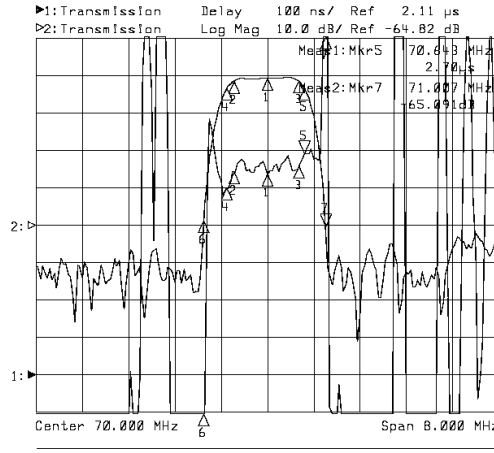


Horizontal: 0.8MHz/Div  
Vertical: 100ns/Div & 10dB/Div

### Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.94	70.00	70.06
Insertion Loss at F0	dB		25.00	26.00
1 dB Bandwidth	MHz	0.90	1.13	
3 dB Bandwidth	MHz	1.20	1.32	
40dB Bandwidth	MHz		2.13	2.30
Passband Variation	dB		0.40	0.50
Group Delay Variation	nsec		80	90
Absolute Delay	usec		2.70	2.75
Ultimate Rejection	dB	45	48	
Substrate Material	-		Quartz	
Ambient Temperature	°C	-40	25	80

### Package

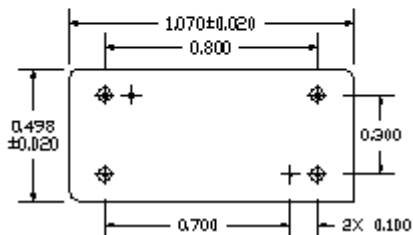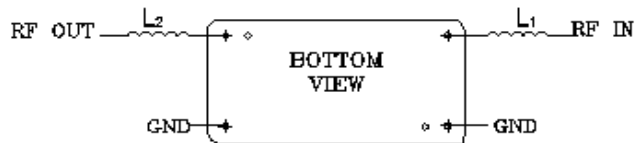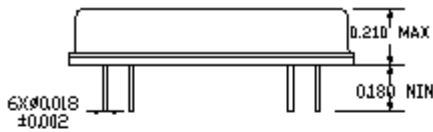

L1: 270nH

L2: 270nH

Source/Load Impedance=50ohm

Package Style XO