



36.5MHz CATV Filter

Part Number B0539

Typical Performance

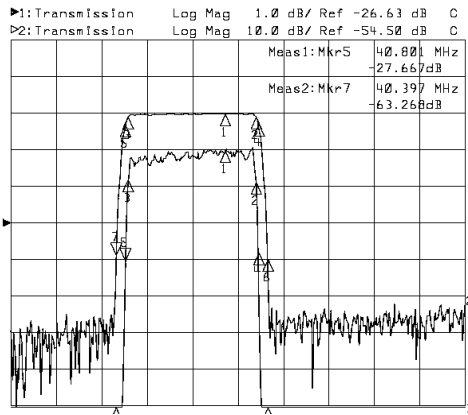

Horizontal: 2MHz/Div
Vertical: 1dB/Div&10dB/Div


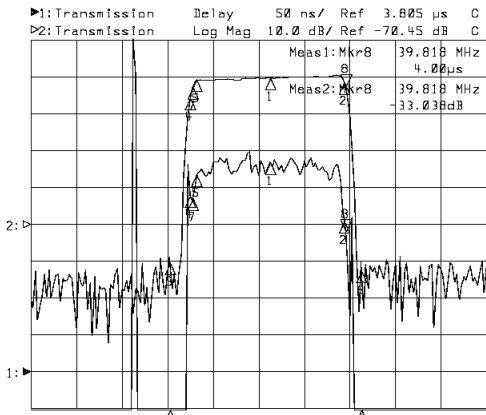


Horizontal: 2MHz/Div
Vertical: 50nsec/Div&10dB/Div

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	36.50	36.52	36.54
Insertion Loss at F0	dB		29.00	32.00
@39.77MHz	dB	0.60	1.00	
@33.278MHz	dB	2.00	3.00	
@40.52MHz	dB	50.00	55.00	
@32.2MHz	dB	45.00	50.00	
Passband Variation	dB		0.40	0.60
Group Delay Variation	nsec		40	60
Absolute Delay	usec		4.09	4.12
Ultimate Rejection	dB	50	55	
Substrate Material	-		YZ-LiNbO3	
Ambient Temperature	°C	-40	60	80

Package (inch)

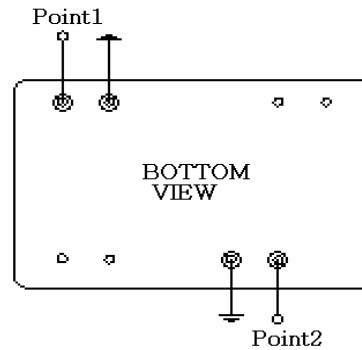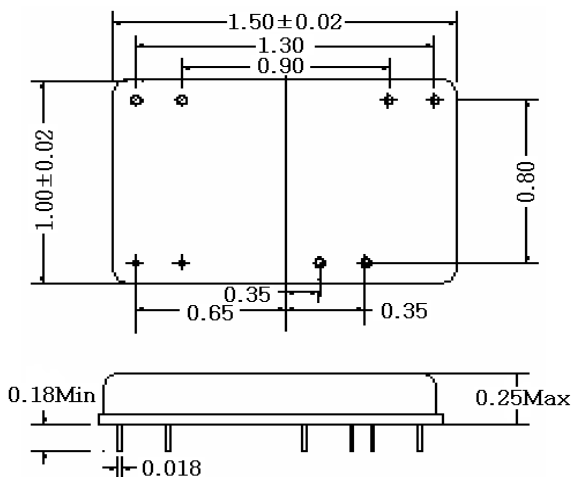

No Matching Required
 Source/Load Impedance=50ohm
 Package Style YS