


## Surface Mount Crystals Tape & Reel Specifications

(All specifications subject to change without notice; Tape & Reel are compliant to EIA-481-A; Please call for other options.)

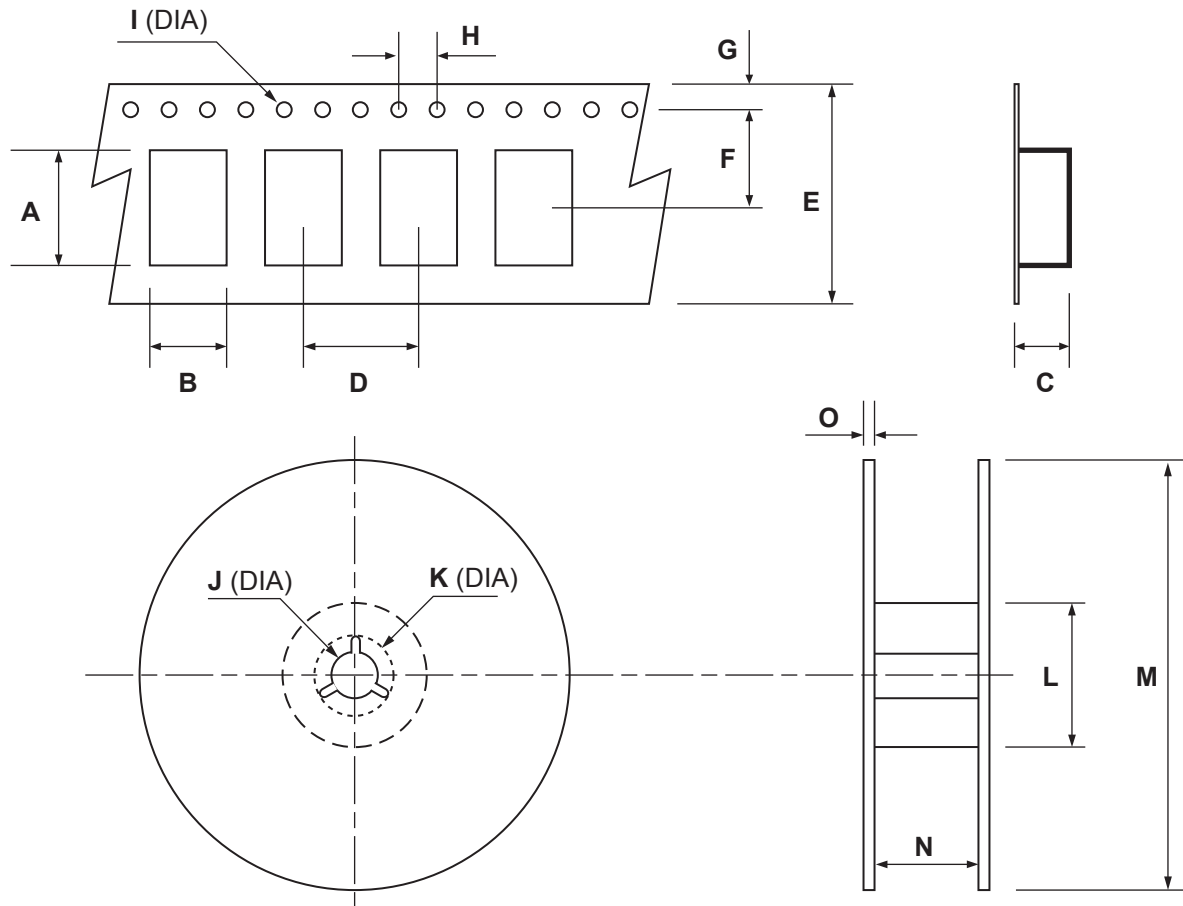

### TAPE SPECIFICATIONS (Unit: mm)

MODEL	A	B	C	D	E	F	G	H	I
HC49SM	13.6	5.5	5.3	12	24	11.5	1.75	4.0	1.5
HC49SSM	13.6	5.5	3.5	12	24	11.5	1.75	4.0	1.5
XCS75	7.4	5.4	1.6	8.0	16	7.5	1.75	4.0	1.5
XCS64	6.5	3.9	2.0	8.0	16	7.5	1.75	4.0	1.5
XCS53	5.4	3.6	1.7	8.0	12	5.5	1.75	4.0	1.5
XCS42	4.4	3.0	1.0	4.0	12	5.5	1.75	4.0	1.5
XCS32	3.6	3.0	1.0	4.0	8	3.5	1.75	4.0	1.5
WXP2A	8.3	4.0	2.7	8.0	16	7.5	1.75	4.0	1.5
HC49USMD	10.0	8.5	5.5	12	24	11.5	1.75	4.0	1.5
HC494PD	13.0	5.4	5.5	12	24	11.5	1.75	4.0	1.5
UM1SMD	12.8	8.0	4.6	12	24	11.5	1.75	4.0	1.5
UM5SMD	11.4	8.0	3.7	12	24	11.5	1.75	4.0	1.5
XCR1	12	5.9	2.40	12	24	11.5	1.75	4.0	1.5

### REEL SPECIFICATIONS (Unit: mm)

MODEL	J	K	L	M	N	O	Note	Quantity/Reel
HC49SM	13	21	80	330	25.5	2.0		1,000
HC49SSM	13	21	80	330	25.5	2.0		1,000
XCS75	13	21	80	180	16.4	3.0		1,000
XCS64	13	21	50	180	16.4	3.0		1,000
XCS53	13	21	80	180	17.5	2.0		1,000
XCS42	13	21	80	180	12.4	2.0		3,000
XCS32	13	21	80	180	9.5	2.0		3,000
WXP2A	13	21	100	330	17.5	2.0		3,000
HC49USMD	13	21	50	330	24.0	3.2		5,000
HC494PD	13	21	50	330	24.4	3.0		1,000
UM1SMD	13	21	50	330	25.5	2.0		1,000
UM5SMD	13	21	50	330	25.5	2.0		1,000
XCR1	13	21	100	330	25.5	2.0		2,000