


# Surface Mount Oscillators Tape & Reel Specifications

(All specifications subject to change without notice; Tape & Reel are compliant to EIA-481-A; Please call for other options.)

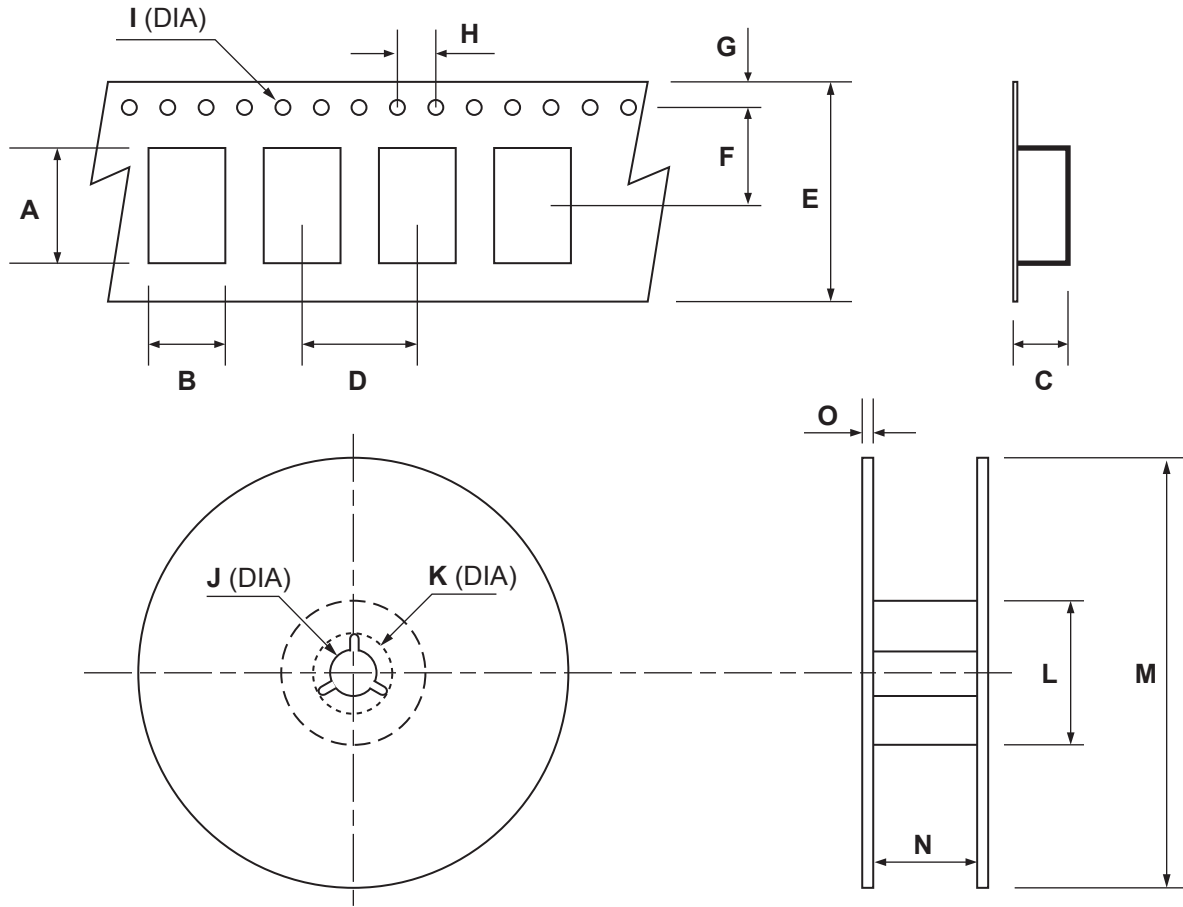

## TAPE SPECIFICATIONS (Unit: mm)

MODEL	A	B	C	D	E	F	G	H	I
XO75	8.0	5.4	2.4	8.0	16	7.5	1.75	4.0	1.5
XO53	5.25	3.45	1.1	8.0	12	5.5	1.75	4.0	1.5
XOPJ	14.5	10	4.8	12	24	11.5	1.75	4.0	1.5
XO75PE, XO75LVDS	7.5	5.5	2.2	8.0	16	7.5	1.75	4.0	1.5
XO32	3.6	2.9	1.25	4.0	8	3.5	1.75	4.0	1.5
XO42-32K768	4.3	2.8	1.3	4.0	12	5.5	1.75	4.0	1.55
XO74-32K768	7.6	4.6	3.1	8.0	12	5.5	1.75	4.0	1.5
XO53PE, XO53LVDS	5.5	3.7	1.9	8.0	12	5.5	1.75	4.0	1.50

## REEL SPECIFICATIONS (Unit: mm)

MODEL	J	K	L	M	N	O	Note	Quantity/Reel
XO75	13	21	60	180	17.5	2.0		1,000
XO53	13	21	80	178	13.5	1.8		1,000
XOPJ	13	21	100	330	25.5	2.0		1,000
XO75PE, XO75LVDS	13	21	100	245	17.5	2.0		1,000
XO32	13	21	60	178	5.5	1.6		1,000
XO42-32K768	13	21	80	178	13.5	1.5		1,000
XO74-32K768	13	21	100	330	12.4	1.5		1,000
XO53PE, XO53LVDS	13	21	100	245	13.5	2.0		1,000