

Temperature Compensated Crystal Oscillators



MINIATURE (7x5 mm) SMD TCXO/VC-TCXO IN LEADLESS PACKAGE - TC75A Series

FEATURES


- RoHS Compliant (Pb-Free), Tight Stability over Wide Temperature Range
- Voltage Control Option for Electric Frequency Adjustments
- Leadless Chip Carrier (LCC) Ultra Small Package, Industry de factor Standard Footprint
- Small Size, Low Profile, Light Weight and Low Power Consumption

SPECIFICATIONS

Frequency Range	10 MHz to 27 MHz
Standard Frequency	12.6/12.8/13.0/14.4/14.85/16.8/19.2/19.44/19.68/19.8 MHz
Input Voltage (Vcc)	2.8 - 5.0 VDC (A=5.0V±5%; B=3.3V±5%; C=3.0V±5%; D=2.8V±5%)
Input Current	2.0 mA Maximum (at 3V, 25°C)
Storage Temperature	-40°C to 85°C
Frequency Stability vs Temp.	015 = ±1.5 ppm; 020 = ±2 ppm; 025 = ±2.5 ppm; 050 = ±5 ppm
Temperature Range	A = 0°C to 70°C; B = -40°C to 85°C; F = 0°C to 50°C; H = -30°C to 75°C
Standard Stability	025H = ±2.5 ppm / -30°C to 75°C
Frequency Stability vs Vcc	±0.2 ppm Maximum / Vcc ± 5%
Frequency Stability vs Load	±0.2 ppm Maximum / 10 kOhms or 10 pF ±10%
Aging	±1 ppm Maximum per year @25°C
Output Load	10 kOhms or 10 pF ±10%
Output Waveform	Clipped Sine wave
Output Level	1.0Vp-p Minimum for Vcc=5.0V; 0.8Vp-p Minimum for Vcc=3.3V
Controllable Frequency Option	±10 ppm Minimum over control voltage range
Control Voltage (Vc)	2.5±2.0 VDC for Vcc = 5 VDC; 1.65±1.5 VDC for Vcc = 3.3 VDC
Setability of Vc at Fnom, 25°C	2.5±0.5 V DC for 5.0V part; 1.65±0.4 VDC for 3.3V part

Creating a Part Number

TC75A-19M800-B V 015 B

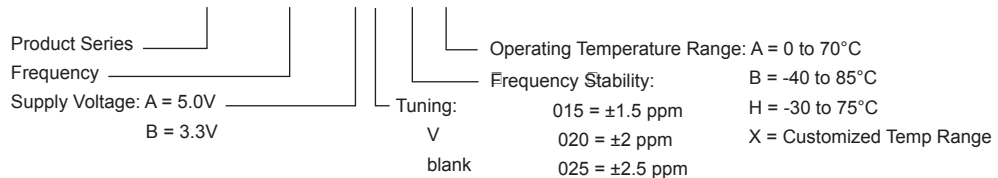

OUTLINE DRAWING

