



**SINEWAVE TCXO / VC-TCXO IN SMD PACKAGE - TCSS Series**

**FEATURES**


- RoHS Compliant (Pb-Free), Tight Stability over Wide Temperature Range
- Available with both Voltage Control for Electric Frequency Adjustments and Internal Trimmer
- Clipped Sinewave Output, Low Phase Noise
- Industry de factor Standard SMD Footprint

**SPECIFICATIONS**

<b>Frequency Range</b>	8 MHz to 40 MHz
<b>Standard Frequency</b>	10.0/12.8/13.0/14.4/15.36/16.8/19.44/20.0/24.576/26.0/40.0 MHz
<b>Supply Voltage (Vcc)</b>	A = 5.0 VDC $\pm$ 5%; B = 3.3 VDC $\pm$ 5%
<b>Input Current</b>	3 mA Maximum
<b>Storage Temperature</b>	-40°C to 85°C
<b>Controllable Frequency Option</b>	VI = Voltage control: $\pm$ 5 ppm Minimum + Internal trimmer: $\pm$ 3 ppm Minimum I = Internal trimmer only (no voltage control input): $\pm$ 3 ppm Minimum
<b>Control Voltage (Vc)</b>	2.5 $\pm$ 2.0 VDC for Vcc = 5 VDC; 1.65 $\pm$ 1.5 VDC for Vcc = 3.3 VDC
<b>Setability of Vc at Fnom, 25°C</b>	2.5 $\pm$ 0.5 V DC for 5.0V part; 1.65 $\pm$ 0.4 VDC for 3.3V part
<b>Frequency Stability vs Temp. Temperature Range</b>	005 = $\pm$ 0.5 ppm; 010 = $\pm$ 1 ppm; 015 = $\pm$ 1.5 ppm; 020 = $\pm$ 2 ppm; 025 = $\pm$ 2.5 ppm A = 0°C to 70°C; B = -40°C to 85°C; F = 0°C to 50°C; H = -30°C to 75°C
<b>Standard Stability</b>	025H = $\pm$ 2.5 ppm / -30°C to 75°C
<b>Frequency Stability vs Vcc</b>	$\pm$ 0.3 ppm Maximum / Vcc $\pm$ 5%
<b>Frequency Stability vs Load</b>	$\pm$ 0.3 ppm Maximum / 10 kOhms// 10 pF $\pm$ 10%
<b>Aging</b>	$\pm$ 1 ppm Maximum per year @25°C
<b>Phase Noise</b>	-145 dBc/Hz at 1KHz
<b>Output Load</b>	10 kOhms or 10 pF
<b>Output Waveform</b>	Clipped Sine wave
<b>Output Level</b>	1.0Vp-p Minimum

**Creating a Part Number**

**TCSS-25M000-A I 015 A**

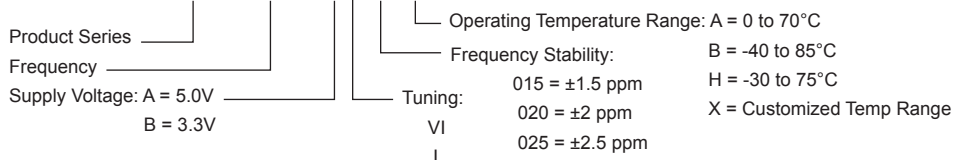

**OUTLINE DRAWING**

