



Standard Thru-hole Ceramic Resonators - ZTA Series

FEATURES

- RoHS Compliant, Wide Frequency Range
- Small Package, External Loading Capacitance
- Industry de factor Standard Leads Spacing
- Superior Shock/Vibration Performance and Environmental Characteristics


STANDARD SPECIFICATIONS

Part Series	Freq. Range (MHz)	Freq. Accuracy (at 25°C)	Freq. Stability over Temperature (-20°C to 80°C)	Aging for 10 Years	Load Capacitance CL1/CL2
ZTA-MG	1.80 - 5.00	±0.5%	±0.3%	±0.3%	30 pF / 30 pF
ZTA-MT	5.01 - 13.00	±0.5%	±0.3%	±0.3%	15 pF / 15 pF
ZTA-MX	13.01 - 50.00	±0.5%	±0.3%	±0.3%	5 pF / 5 pF

Part Number Guide: ZTA-Frequency-MG/MT/MX-Others

Part Number Example: ZTA-5M000-MG-TR, TR for Tape and Reel Packing

TEST CIRCUIT

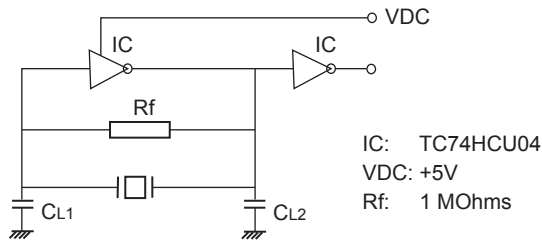

OUTLINE DRAWING

